

Versatile and universal lifting experience!



This lift has been designed, developed and manufactured
according to recommendations of EN1493:2022

Structural features

Asymmetric installation for better door-opening angle.



- Stable, strong bend posts with internal reinforcement
- Designed in 2-parts to optimize transport and installation of the lift
- Low minimum height

- Low minimum height
- Lifting area with 3-stage arms: from short wheelbase to medium wheelbase, including vans
- Parallel parking of arms in the rear for an easier positioning of vehicles



Operating system

- Efficient hydraulic system with pushing cylinders
- Synchronization cables

Protections

- Rubbers for door-protection
- Encapsulated arm rotation locking system with 360-degree toothed engagement, ensuring stability and safety





- CE safety stop before final descent: no foot guard bar required
- Electrical-operated mechanical safety lock



Maximum installation flexibility

- Top crossbar with maximum height limit function, designed in two parts
- Top crossbar with adjustable mounting to reduce installation width from 3500 mm to 3250 mm, suitable for any workshop

DIMENSIONS

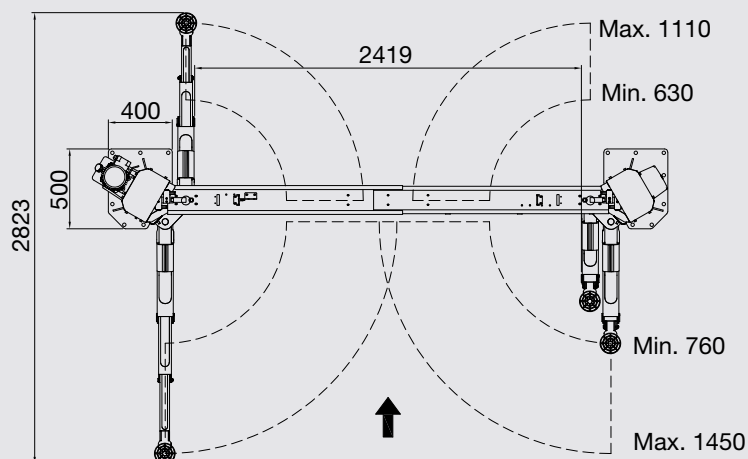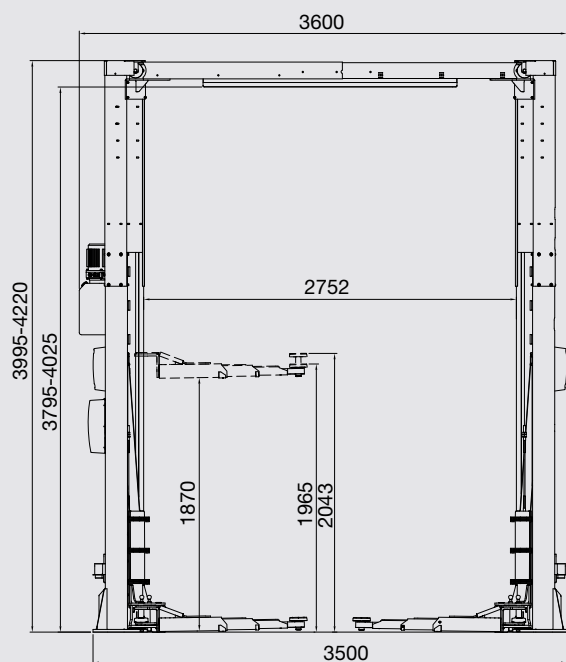


Optional accessories

- Secondary lowering speed kit for slower and more controlled descent:
J213-4100000
- Height extension 700 mm:
J213-4200000
- Base-plate for installation – to reduce effective concrete thickness:
NX1316014
- Lifting pads for ultra-low vehicles: minimum height 78 mm:
NX1316006

See separate catalogue for further accessories

Dotation

- Double telescopic lifring pad with large adjustability range (up to 4 ton)
- 95-174 mm
- Extensions: 50 mm and 100 mm

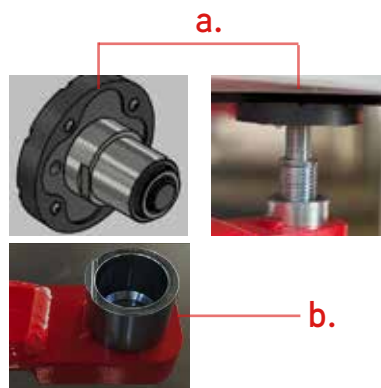

NEW E-CAR ACCESSORIES



8-48100075



8-48100073



NX1316051



NX1316064

TECHNICAL DATA

Maximum capacity	4000 kg
Lift height	3995 - 4220 mm
Mounting width	3500 - 3250 mm
Minimum useful height	95 mm
Maximum useful height	2043 mm
3-phase motor	400/230V - 3kW - 3Ph - 50/60Hz
1-phase motor	230V - 3kW - 1Ph - 50/60Hz
Minimum installation depth	100 - 140 mm*

*refer to installation drawings and user manual



www.corgi.com

CORGI is a brand of the NEXION Spa group

Via Strada Statale 468, n. 9 - 42015 Correggio (RE) | +39 0522 639111 | info@corgi.com

