




ERCO HC4002



4000



**Electro-hydraulic
two post lifts**



Versatile and universal lifting experience!

STRUCTURAL FEATURES

Asymmetric installation for better door-opening angle.



- Stable, strong bend posts with internal reinforcement
- Designed in 2-parts to optimize transport and installation of the lift



- Low minimum height
- **Lifting area with 3-stage arms:** from short wheelbase to medium wheelbase, including vans
- Parallel parking of arms in the rear for an easier positioning of vehicles
- Double-threaded lifting pads: set of 4 pad extensions included as standard

OPERATING SYSTEM


- Efficient hydraulic system with pushing cylinders
- Synchronization cables

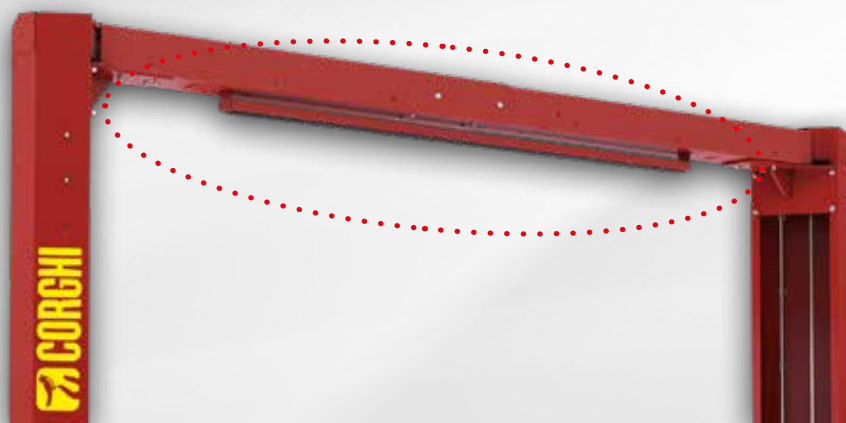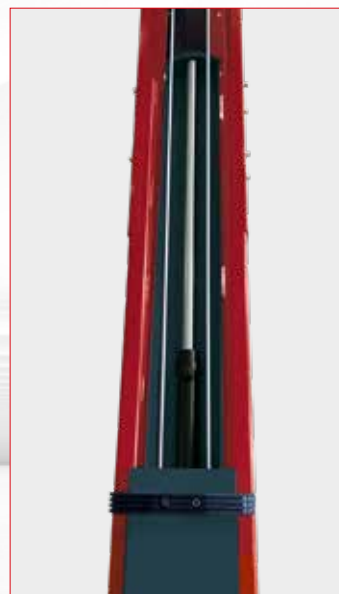

MAXIMUM INSTALLATION FLEXIBILITY!

- Top crossbar with maximum height limit function, designed in two parts
- Top crossbar with adjustable mounting to reduce installation width from 3500 mm to 3250 mm, suitable for any workshop

SAFETY FEATURES

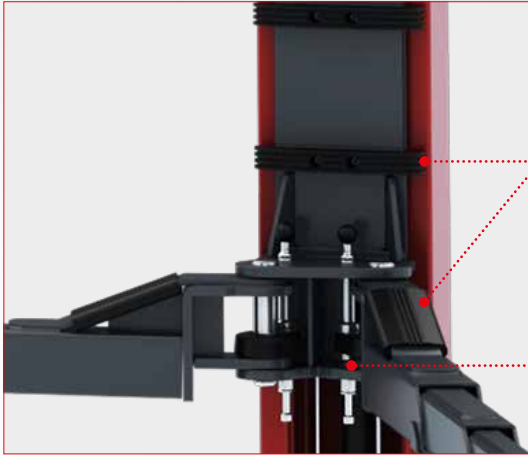

- Rubbers for door-protection

- Encapsulated arm rotation locking system with 360-degree toothed engagement, ensuring stability and safety



- CE safety stop before final descent: no foot guard bar required

- Electrical-operated mechanical safety lock

RECOMMENDED ACCESSORIES

- Secondary lowering speed kit for slower and more controlled descent
- Height extension 700 mm
- Base-plate for installation – to reduce effective concrete thickness
- Lifting pads for ultra-low vehicles: minimum height 78 mm



NEWS

E-car accessories



See separate catalogue for further accessories.

DIMENSIONS

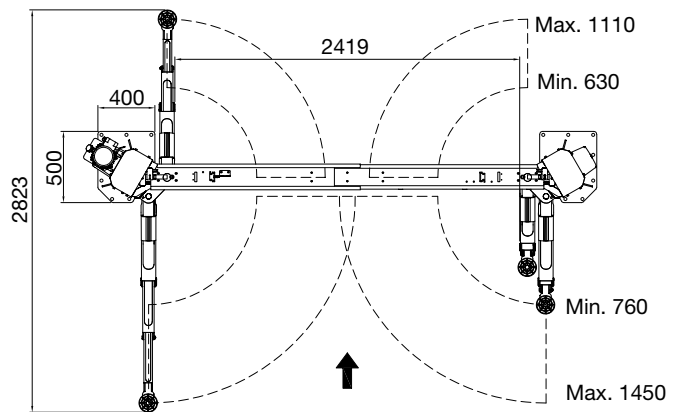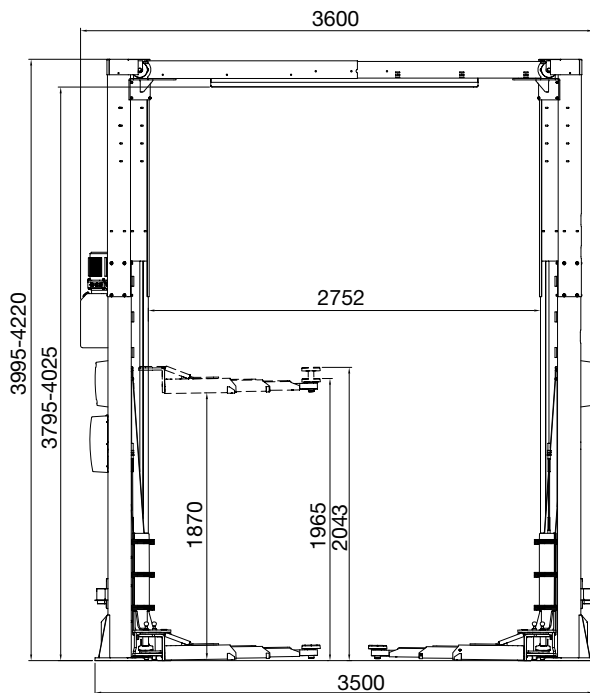

TECHNICAL DATA

Model	Erco HC4002
Maximum capacity	4000 kg
Lift height	3995 - 4220 mm
Minimum useful height	95 mm
Maximum useful height	2043 mm
3-phase motor	400/230V - 3kW - 3Ph - 50/60Hz
1-phase motor	230V - 3kW - 1Ph - 50/60Hz
Minimum installation depth	100 - 140 mm*
*refer to installation drawings and user manual	

The manufacturer reserves the right to modify the features of its products at any time.