CORGHI

Electrohydraulic lift
ERCO XC5500
ERCO XC4500

ELECTROHYDRAULIC UNDERWHEEL SCISSORS TYPE LIFT

Designed for total wheel alignment, available in the “CT” configuration, equipped with rear oscillating platforms and recesses for front turntables.
Also available with an auxiliary wheel release lift “LT”, ideal for facilitating maintenance and service operations.



Versions available:
ERCO XC5500 - ERCO XC5500 CT - ERCO XC5500 CT LT
ERCO XC4500 - ERCO XC4500 CT - ERCO XC4500 CT LT

5500
4500



FEATURES

LIFT TABLE WITH DOUBLE CYLINDER

Lift table with **double lifting cylinder** to ensure a constant parallel lift movement.





CONTROL UNIT

Control unit with few **essential keys**, **clear and intuitive functional icons**.

ADJUST THE BASE FRAME

The wheel alignment versions of the range already include the possibility of **adjust the base frame**.





TURNTABLE

Adjustable recess for the **turntable**.

MECHANICAL SAFETY DEVICE

Adjustable mechanical safety device, also for exact adjustment for wheel alignment.





SLIDING PLATES

Sliding plates with air central locking.

SHORT RAMPS

Easy drive on with **short and sturdy ramps** due to very low height.






DOUBLE LIFTING LEVER

Double lifting lever to ensure a constant parallel lift movement.

LIFT-TABLE WITH DOUBLE EXTENSIONS

Lift table with double lifting cylinder and double extensions, in front and rear, which is very flexible, no movement of vehicle on the lift needed.

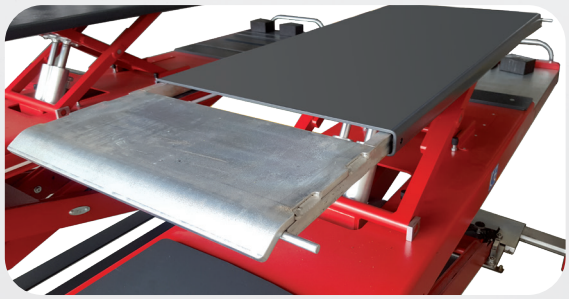

TECHNICAL DATA

ERCO XC5500 - ERCO XC5500 CT - ERCO XC5500 CT LT	
Main lift capacity	5500 kg
"LT" capacity	4000 kg
Lifting time	45 s
Motor	400/230V - 3kW 3Ph - 50/60Hz
Main lift max.lifting height	2010/2030/2090 mm
"LT" max.lifting height	411 mm
Lift minimum height	165/185/240 mm
Runboard length	4608/5208 mm

ERCO XC4500 - ERCO XC4500 CT - ERCO XC4500 CT LT	
Main lift capacity	4500 kg
"LT" capacity	4000 kg
Lifting time	45 s
Motor	400/230V - 3kW 3Ph - 50/60Hz
Main lift max.lifting height	2010/2030/2090 mm
"LT" max.lifting height	411 mm
Lift minimum height	165/185/240 mm
Runboard length	4208 mm

SUPPLIED ACCESSORIES

- Automatic runway levelling system with master/slave hydraulic circuit.
- Self-lubricating bushings on all rotating parts.
- Set of 4 rubber pads.


OPTIONAL ACCESSORIES


- Pair of cross pieces and pads for off-road vehicles.
- Kit for flush installations.

**See separate catalogue for further accessories.*


DIMENSIONS


ERCO XC5500 - ERCO XC4500

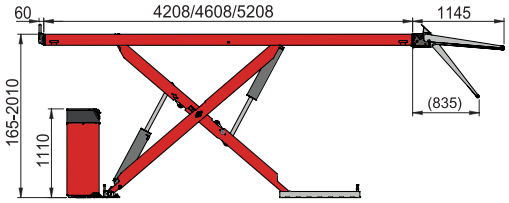

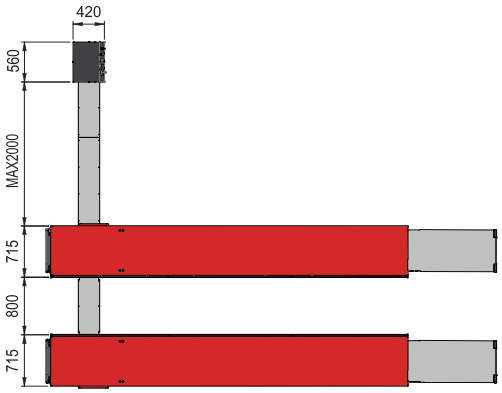



ERCO XC5500 CT - ERCO XC4500 CT

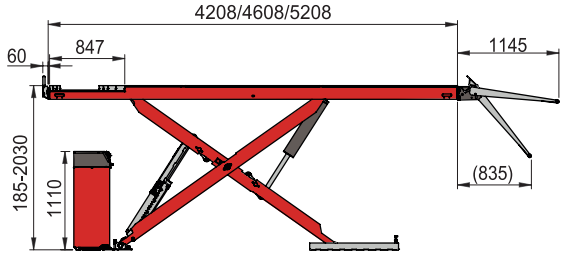

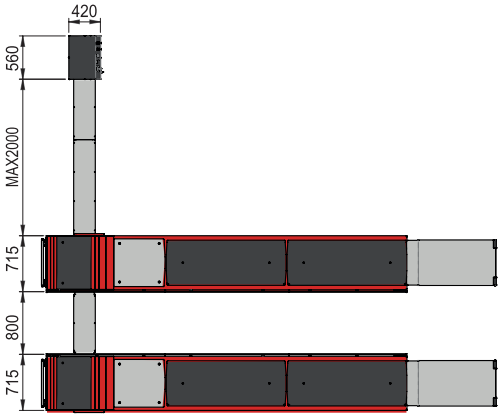

ERCO XC5500 CT LT - ERCO XC4500 CT LT

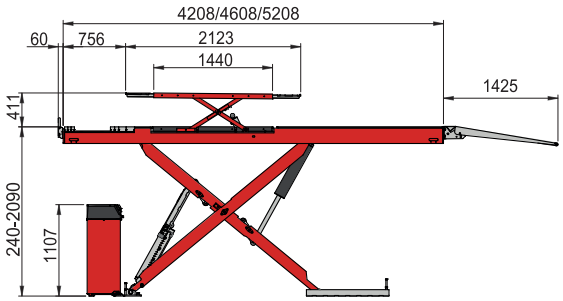

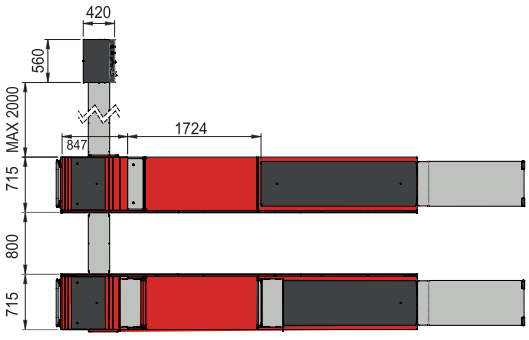

Cod. DPCG001727_10/2026

Photographs, features, and technical specifications are not binding and may be subject to change without prior notice. Cod. DPCG001707_07_2026

CORGHI
www.corghi.com

CORGHI is a brand of Nexion Group
Via Strada Statale 468, n. 9 - 42015 Correggio (RE)
+39 0522 639111 | info@corghi.com